

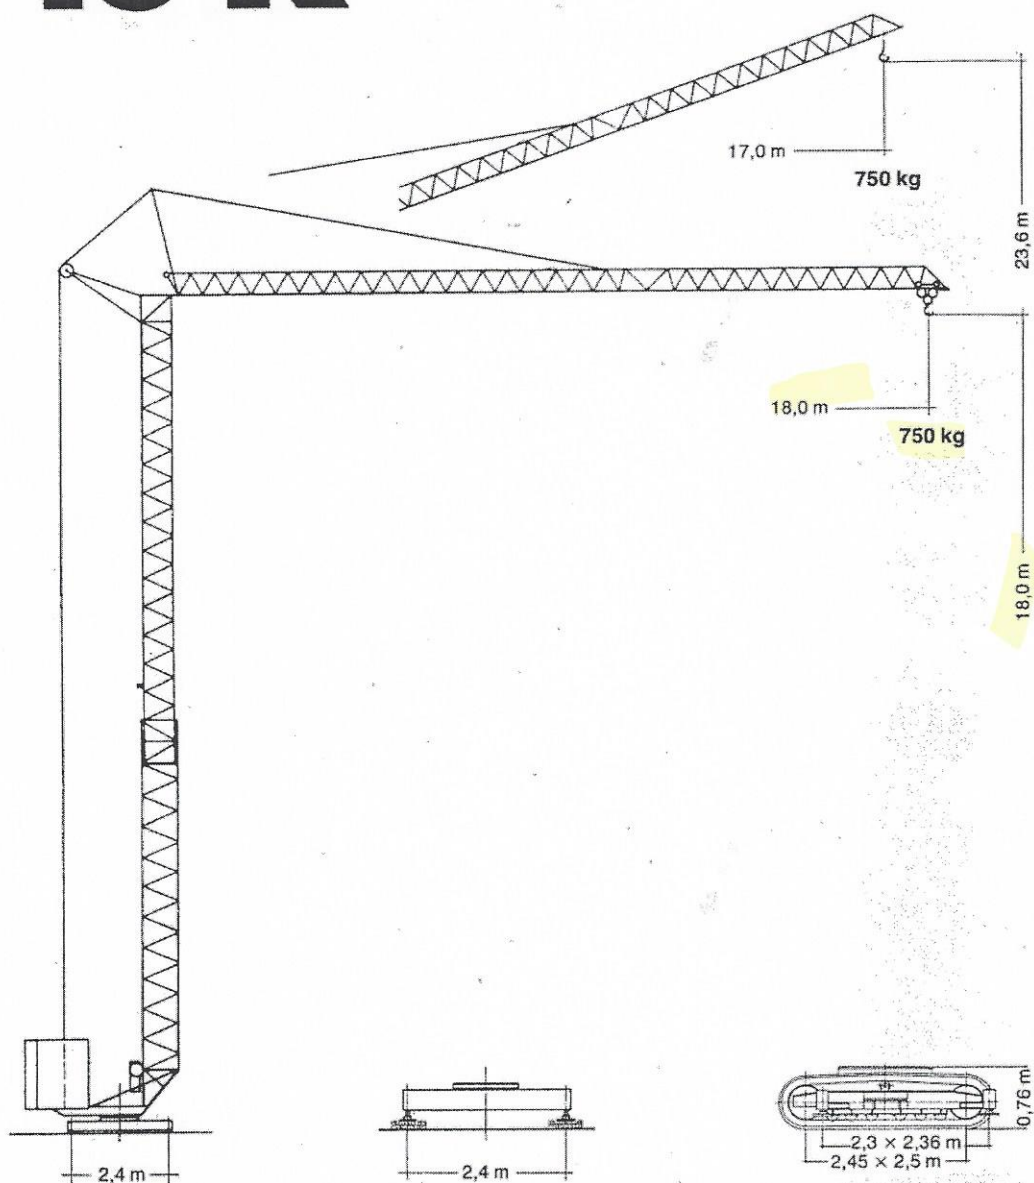



Tower Crane
Grue à tour



Turmdrehkran **13 K**

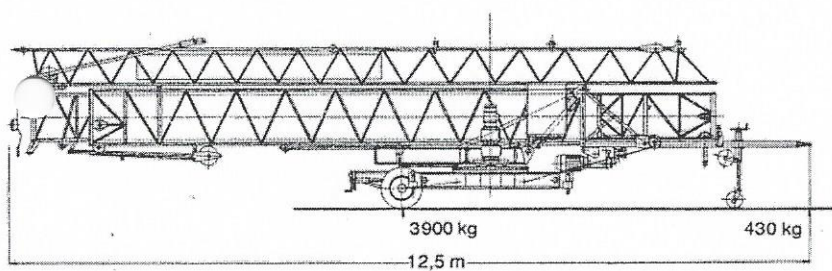

LIEBHERR

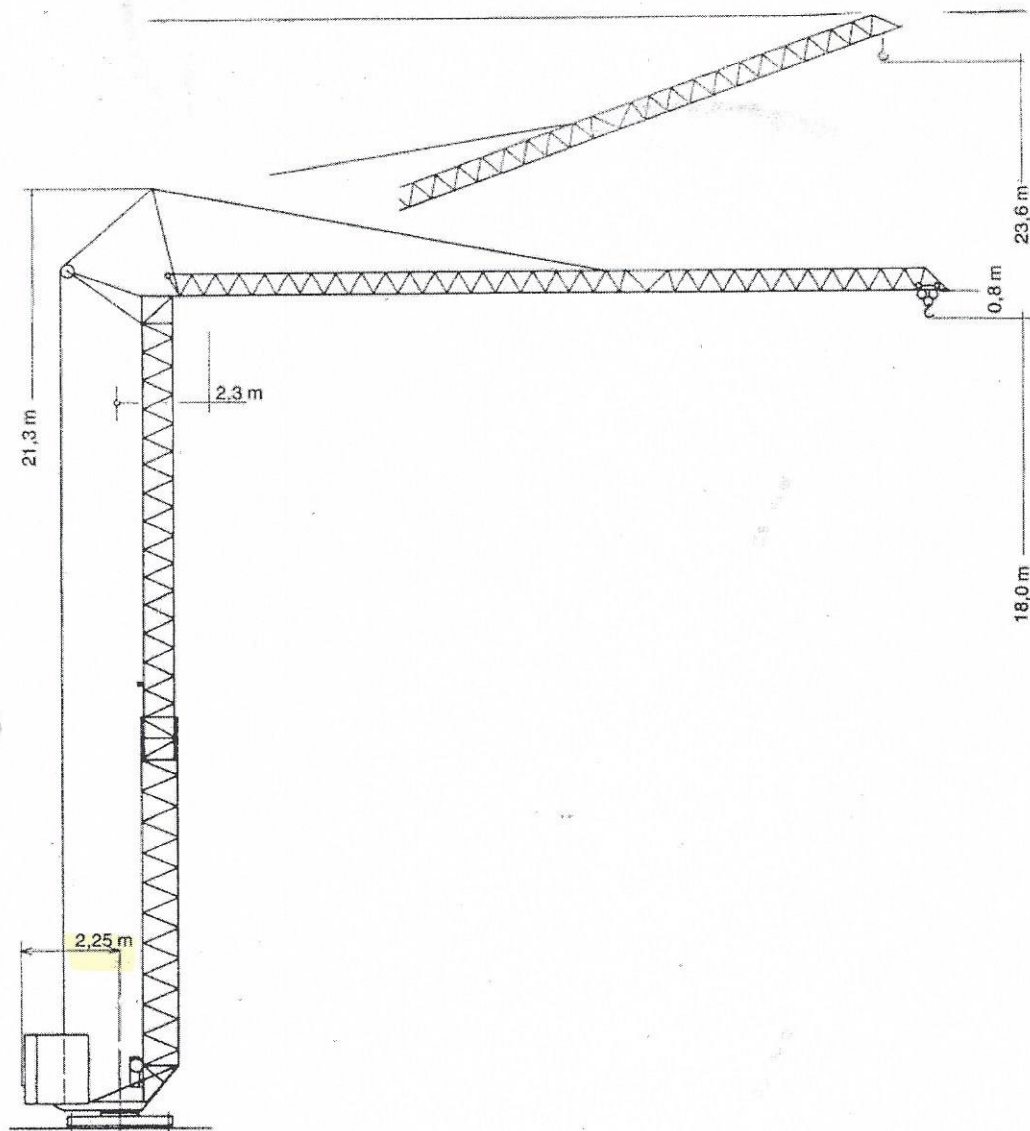

Transportgewicht 4250 kg
Transport weight
Poids de transport

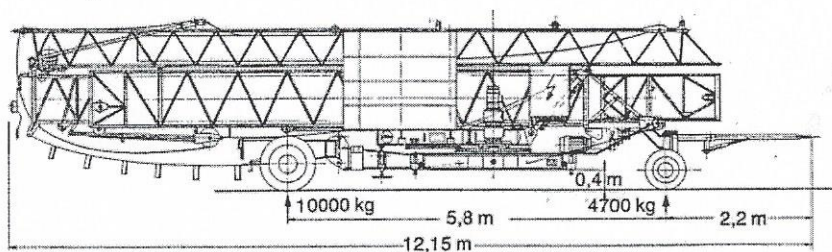

Transportgewicht 14700 kg
Transport weight
Poids de transport

13 K

Gewicht

Weight

Poids

Max. Eckkraft in Betrieb Max. corner pressure in operation Réaction max. par angle en service	82,5 kN
Zentralballast ca. (nur in Österreich) Central ballast approx. (only in Austria) Lest-fixe de chassis env. (seulement en Autriche)	600 kg

1 kN $\approx$ 100 kp

Gegengewicht ca. Counter weight approx. Contrepoids env.	8800 kg
Konstruktionsgewicht Dead weight Poids de la construction	3900 kg

Ausladung und Tragfähigkeit

Radius and capacity



Portée et charge

Auslegerlänge Length of jib Longueur de flèche	Max. Tragfähigkeit Max. capacity Charge max.	Ausladung und Tragfähigkeit m/kg Radius and capacity Portée et charge						
		12,0	13,0	14,0	15,0	16,0	17,0	18,0
18,0	2,3 – 11,7 1250	1220	1110	1010	930	860	800	750

Geschwindigkeiten

Speeds

Vitesses

	U/min 1,0 st./min tr./mn	1,1 kW
	25,0 m/min	0,75 kW

Hubwerk Hoist gear Mécanisme de levage	Gang Gear Boîte	kg	m/min
5,1 kW	1	1250	10,0
	2	750	30,0

Kabelquerschnitt bei 380 V
Cross section of cable
Section of câble
Betriebsspannung 380 V
Operating voltage
Tension de service

bis 30 m
up to
jusqu'à
Frequenz 50 Hz
Frequency
Fréquence

4 × 4 mm²

Gesamtmotorenleistung 7,0 kW
Total motor output
Puissance totale des moteurs

Technische Daten - Technical data

Caractéristiques techniques